


- Press the **Home button** to turn on the controller.
- Hold the **Home button** for 3 seconds to turn off the controller.
- Hold the **Home button** for 8 seconds to force the controller off.



- \* 开机:按下 **Home** 键。
- \* 关机:按住 **Home** 键 3 秒。
- \* 强制关机:按住 **Home** 键 8 秒。

## Switch

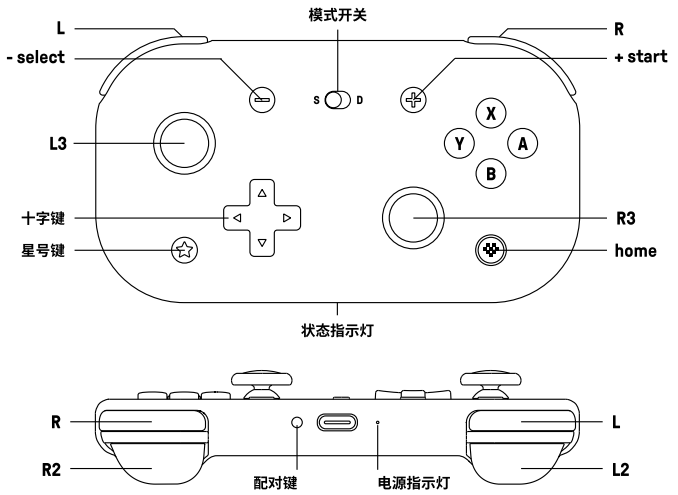

- Please ensure your Switch system is 3.0.0 or above.
- NFC scanning, IR camera, HD rumble, and notification LED are not supported, nor can the system be waken up wirelessly.

### Bluetooth Connection

1. Turn the **Mode switch** to **S**.
2. Press the **Home button** to turn on the controller, the **LED indicator** will start to blink rapidly.
3. Hold the **Pair button** for 3 seconds to enter its pairing mode, the **LED indicator** will stop blinking for a short moment and blink again. (This is required for the very first time only)
4. Go to your Switch settings, click on "Controllers", then click on "Change grip/order" and wait for the connection. The **LED indicator** will become solid to indicate a successful connection.

### Wired Connection

- Go to **System Setting > Controller and Sensors > turn on Pro Controller Wired Communication**.

  1. Turn the **Mode switch** to **S**.
  2. Connect the controller to the USB port of your Switch and wait till the controller is successfully recognized by your Switch before using it.

## Switch



- \* 要求 Switch 主机系统版本为 3.0.0 或更高版本。
- \* 不支持 NFC 扫描、红外摄像头、HD 振动、通知灯、唤醒主机等功能。

### 蓝牙连接

1. 将 **模式开关** 移动到 **S** 位置。
2. 按下 **Home** 键 开启手柄, **状态指示灯** 左右滚动闪烁。
3. 按住 **配对键** 约 3 秒至 **状态指示灯** 短暂熄灭后左右滚动闪烁, 进入配对状态。(仅首次连接时需要配对)
4. 打开 Switch 主机 "手柄" 选项, 选择 "更改握法 / 顺序", 连接完成后, **状态指示灯** 常亮。

### 有线连接

- \* 请确保 **设置 - 手柄与传感器 - Pro 手柄的有线连接** 功能已开启。

  1. 将 **模式开关** 移动到 **S** 位置。
  2. 使用 USB 线将手柄连接到 Switch 主机的 USB 端口, 等待系统识别完成后即可使用。

## Android



- Please ensure your Android system is 9.0 or above.

### Bluetooth Connection

1. Turn the **Mode switch** to **D**.
2. Press the **Home button** to turn on the controller, the **1st LED indicator** will start to blink.
3. Hold the **Pair button** for 3 seconds to enter its pairing mode, the **LED indicator** will start to blink rapidly. (This is required for the very first time only)
4. Go to your Android device's Bluetooth setting and pair with **[8BitDo Lite 2]**, the **LED indicator** will become solid to indicate a successful connection.

### Wired Connection

- OTG support is required for your Android device. Please contact your device manufacturer for more details.

  1. Turn the **Mode switch** to **D**.
  2. Connect the controller to the USB port of your Android device and wait till the controller is successfully recognized by your Android device before using it.

## Android



- \* 要求 Android 设备系统为 Android 9.0 或更高版本。

### 蓝牙连接

1. 将 **模式开关** 移动到 **D** 位置。
2. 按下 **Home** 键 开启手柄, 1 号 **状态指示灯** 闪烁。
3. 按住 **配对键** 约 3 秒至 **状态指示灯** 左右滚动闪烁, 进入配对状态。(仅首次连接时需要配对)
4. 打开 Android 设备蓝牙, 搜索 **8BitDo Lite 2** 设备连接, 连接完成后 **状态指示灯** 常亮。

### 有线连接

- \* 要求 Android 设备支持 OTG 功能, 详情请咨询设备制造商。

  1. 将 **模式开关** 移动到 **D** 位置。
  2. 使用 USB 线将手柄连接到 Android 设备的 USB 端口, 等待系统识别完成后即可使用。

## Apple

- iOS16.3, iPadOS® 16.3, tvOS® 16.3, macOS® 13.2, visionOS 1.1 or above is required.

Apple®, iPadOS®, macOS®, and tvOS® are trademarks of Apple Inc., registered in the U.S. and other countries.

### Bluetooth Connection

1. Turn the **Mode switch** to **D**.
2. Press the **Home button** to turn on the controller, the **1st LED indicator** will start to blink.
3. Hold the **Pair button** for 3 seconds to enter its pairing mode, the **LED indicator** will start to blink rapidly. (This is required for the very first time only)
4. Go to your Android device's Bluetooth setting and pair with **[8BitDo Lite 2]**, the **LED indicator** will become solid to indicate a successful connection.

### Wired Connection

- Only the macOS, iOS and iPadOS devices with USB Type-C port are supported.

  1. Turn the **Mode switch** to **D**.
  2. Connect the controller to the USB port of your Apple device and wait till the controller is successfully recognized by your Apple device before using it.

## Apple

- \* 要求 iOS 16.3, iPadOS 16.3, tvOS 16.3, macOS 13.2, visionOS 1.1 或更高版本。

### 蓝牙连接

1. 将 **模式开关** 移动到 **D** 位置。
2. 按下 **Home** 键 开启手柄, 1 号 **状态指示灯** 闪烁。
3. 按住 **配对键** 约 3 秒至 **状态指示灯** 左右滚动闪烁, 进入配对状态。(仅首次连接时需要配对)
4. 打开 Apple 设备蓝牙, 搜索 **8BitDo Lite 2** 设备连接, 连接完成后 **状态指示灯** 常亮。

### 有线连接

- \* 仅 macOS 和配备 USB-C 端口的 iOS, iPadOS 设备支持有线连接。

  1. 将 **模式开关** 移动到 **D** 位置。
  2. 使用 USB 线将手柄连接到 Apple 设备的 USB 端口, 等待系统识别完成后即可使用。

## Turbo Function



- **D-Pad, Left/Right joystick, Home, minus, plus buttons** are not supported.
- The turbo settings will not be saved permanently and will revert to default settings after the controller is powered off or disconnected.
- Turbo function is not supported when use on Switch.

### Turbo Mode

Turn on: Hold the button you would like to assign the turbo functionality, then press the **Star button** to enable the Turbo Mode, the **4th LED indicator** will blink rapidly.  
Turn off: Hold the button you would like to deactivate the turbo functionality, then press the **Star button** to disable the Turbo Mode, the **4th LED indicator** will turn off.

### Auto Turbo Mode

Turn on: Hold the button you would like to assign the turbo functionality, then press the **Star button** twice to enable the Auto Turbo Mode, the **4th LED indicator** will blink rapidly.  
Turn off: Hold the button you would like to deactivate the turbo functionality, then press the **Star button** to disable the Auto Turbo Mode, the **4th LED indicator** will turn off.

## 连发功能



- \* **方向键、左 / 右摇杆、Home、-、+ 键** 不支持连发。
- \* 连发功能不会保存, 关机或断开连接后恢复默认。
- \* 连接 Switch 时不支持连发。

### 连发

按住功能键, 再按下 **星号键** 可开启连发, 4 号 **状态指示灯** 闪烁。  
按住功能键, 再按下 **星号键** 可关闭连发, 4 号 **状态指示灯** 熄灭。

### 自动连发

按住功能键, 再按下 **2 下星号键** 可开启自动连发, 4 号 **状态指示灯** 闪烁。  
按住功能键, 再按下 **星号键** 可关闭自动连发, 4 号 **状态指示灯** 熄灭。

## Battery



- Built-in 480mAh rechargeable lithium polymer battery, it provides approximately 20 hours of play time, with 1 hour of charging time.

Status –	LED indicator –
Low battery	Red LED blinks
Battery charging	Red LED stays solid
Fully charged	Red LED turns off

- The controller will automatically shut down if it fails to connect within 1 minute of startup, or if there are no operations within 15 minutes after establishing a connection.
- The controller will not shut down during wired connection.

## Safety Warnings



- Please always use batteries, chargers, and accessories provided by the manufacturer.
- The manufacturer is not liable for any safety issues arising from the use of non-manufacturer-approved accessories.
- Do not attempt to disassemble, modify, or repair the device yourself. Unauthorized actions may result in serious injury.
- Avoid crushing, disassembling, puncturing, or attempting to modify the device or its battery, as these actions can be dangerous.
- Any unauthorized changes or modifications to the device will void the manufacturer's warranty.

## 电源



- \* 配备 480mAh 可充电式锂聚合物电池, 充电时间约 1 小时, 可持续使用约 20 小时。

电源状态 –	电源指示灯状态 –
电量不足	红灯闪烁
正在充电	红灯常亮
充电完成	红灯熄灭

- \* 开机后 1 分钟内无连接, 或连接后 15 分钟无操作会自动关机。
- \* 使用有线连接时不会自动关机。

## 安全警示



- \* 请使用制造商的电池、充电器、配件。
- \* 在用户使用第三方的配件时, 制造商不能对用户的安全负责。
- \* 请勿自行拆卸、改装或修理设备。
- \* 请勿挤压、拆解、刺穿或尝试改装设备及电池。
- \* 对设备的任意变动或改装, 将导致制造商对设备不予保修。

## Support



- Please visit [support.8bitdo.com](http://support.8bitdo.com) for further information & additional support.



## 技术支持



- \* 请访问 [support.8bitdo.cn](http://support.8bitdo.cn) 了解详细信息。

