


Ultimate 3-mode Controller for Xbox


English

猎户座三模手柄 (Xbox)

中文

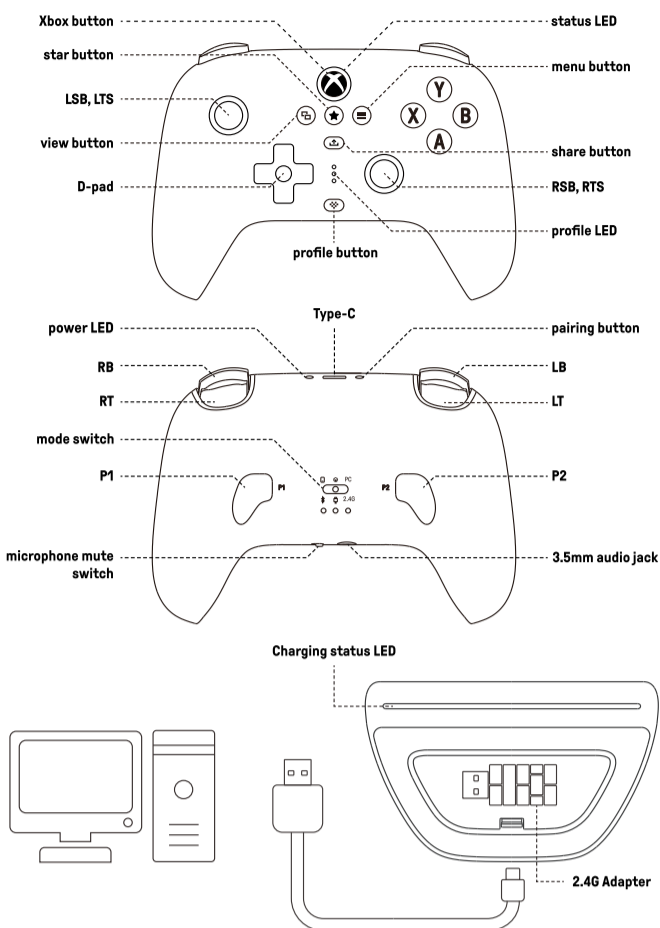

- Press the **Xbox button** to turn on the controller.
- Hold the **Xbox button** for 6 seconds to turn off the controller.
- Hold the **Xbox button** for 12 seconds to force the controller off.

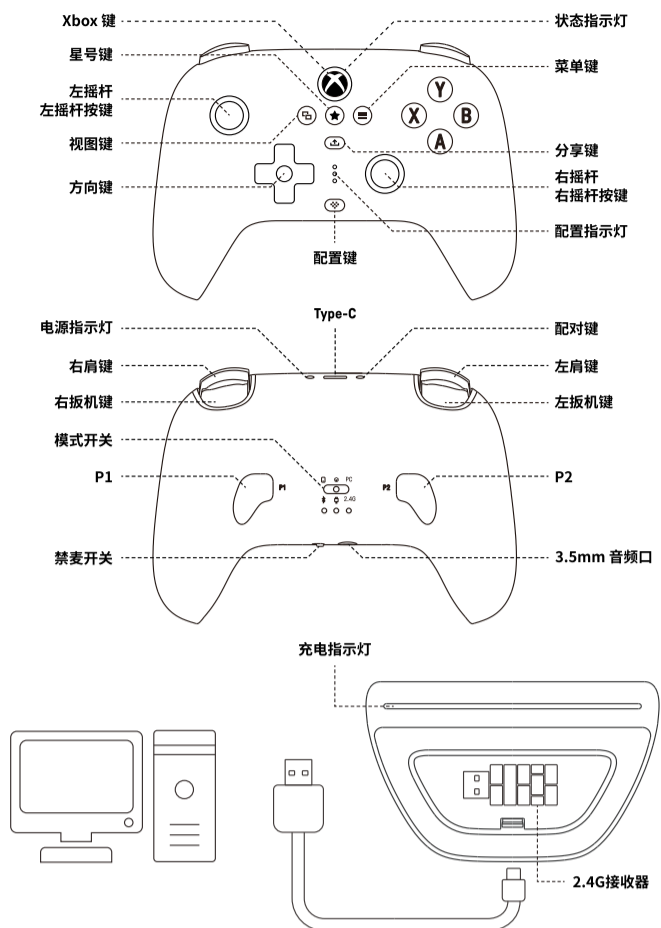

- \* 开机:按下 **Xbox 键**。
- \* 关机:按住 **Xbox 键** 6 秒。
- \* 强制关机:按住 **Xbox 键** 12 秒。

Xbox Series/One console



- The latest system version of the Xbox console is required.

Wired Connection

1. Turn the **mode switch** to **Xbox/USB** position.
2. Connect the controller to your Xbox console via a USB cable.
3. Press the **Xbox button** to turn on the controller and wait till the controller is successfully recognized by the console. The **LED indicator** will stay solid when the connection is successful.

Windows 10/11



- Windows 10(1903) or above is required.

Wireless Connection

1. Connect the **2.4G adapter** to your Windows device.
2. Turn the **mode switch** to **PC/2.4G** position.
3. Press the **Xbox button** to turn on the controller and wait till the controller is successfully recognized by the device. Both **LED indicators** on the controller and the adapter will stay solid when the connection is successful.

Wired Connection

1. Turn the **mode switch** to **Xbox/USB** position.
2. Connect the controller to your Windows device via a USB cable.
3. Press the **Xbox button** to turn on the controller and wait till the controller is successfully recognized by the console. The **LED indicator** will stay solid when the connection is successful.

Android



- Android 9.0 or above is required.

Bluetooth Connection

1. Turn the mode switch to **Mobile/Bluetooth** position.
2. Press the **Xbox button** to turn on the controller.
3. Hold the **Pairing button** for 3 seconds to enter the pairing mode, the **LED indicator** will blink rapidly. (This is required for the very first time only.)
4. Go to your Android device's Bluetooth list and pair with [8BitDo Ultimate 3mode Xbox], the **LED indicator** will stay solid when the connection is successful.

Xbox Series 系列 / One 系列主机



- \* 要求 Xbox 主机系统版本已更新到最新版本。

有线连接

1. 将 **模式开关** 移动到 **有线** 位置。
2. 使用 **USB 线** 将手柄连接到 Xbox 主机的 **USB 端口**
3. 按下 **Xbox 键** 开启手柄, 等待系统识别完成后, **状态指示灯** 常亮。

Windows 10 / 11



- \* 要求 Windows 设备系统版本为 Windows 10 (1903) 或更高版本。

无线连接

1. 将配备的 **2.4G 接收器** 连接到 Windows 设备的 **USB 端口**。
2. 将 **模式开关** 移动到 **2.4G** 位置。
3. 按下 **Xbox 键** 开启手柄, 等待系统识别完成后, **状态指示灯** 常亮。

有线连接

1. 将 **模式开关** 移动到 **有线** 位置。
2. 使用 **USB 线** 将手柄连接到 Windows 设备的 **USB 端口**。
3. 按下 **Xbox 键** 开启手柄, 等待系统识别完成后, **状态指示灯** 常亮。

Android




- \* 要求 Android 设备系统版本为 Android 9.0 或更高版本。

蓝牙连接

1. 将 **模式开关** 移动到 **蓝牙** 位置。
2. 按下 **Xbox 键** 开启手柄。
3. 按住 **配对键** 约 3 秒至 **状态指示灯** 快速闪烁, 进入配对状态。(仅首次连接时需要配对)
4. 打开 Android 设备蓝牙, 搜索 8BitDo Ultimate 3mode Xbox 手柄连接, 连接完成后 **状态指示灯** 常亮。


Volume Control

- Press and hold the following button combos to adjust the balance between voice and game volume.
  - Beeps when adjusted to maximum/minimum, vibration when adjusted to middle value.
  - 3.5mm earphones are not supported when connected via Bluetooth.
- Press and hold the **Profile button + D-pad up/down** to turn up/down in-game volume.  
Press and hold the **Profile button + D-pad left/right** to adjust the balance between voice and game volume.

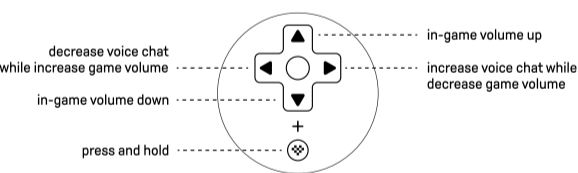

声音调节

- \* 可通过组合键调整耳机的音量与声音平衡。调整到最大 / 最小值时会有提示音表示已调整到极限, 调整到中间值 (默认) 时会有振动提示。
  - \* 已交换的按键按下时 **配置指示灯** 会持续闪烁表示此按键的功能已变更。
  - \* 蓝牙连接时不支持 3.5mm 耳机。
- 按住 **配置键 + 方向键上、下** 可提高、降低音量。  
按住 **配置键 + 方向键左、右** 可调节语音、游戏之间的音量平衡。

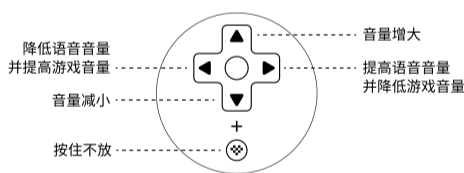

Fast Button Swap

- The Fast Button Swap feature is temporary and will revert to default settings upon reconnection. For permanent button configuration, please use Ultimate Software X.
- The **Profile LED indicator** will blink continuously when the swapped button is pressed.
- **D-pad, View, Menu, Share, Xbox, LT, and RT** buttons are not supported for the button swap.
- Press and hold any of the two buttons, then press the **Star button** to activate the Fast Button Swap. Repeat the same procedure or reconnect the controller will deactivate the function.

快速交换按键

- \* 快速交换按键功能仅适用于临时重新交换按键功能, 重新连接后失效。若要固定修改请使用精英软件 X。
- \* 已交换的按键按下时 **配置指示灯** 会持续闪烁表示此按键的功能已变更。
- \* **方向键、视图键、菜单键、分享键、Xbox 键、LT 键、RT 键** 不支持交换。
- \* 按住需要交换的两个按键, 再按下 **星号键** 完成交换。重复此操作或重新连接手柄可取消此功能。

P1/P2 Button Configuration

- Only one button on the controller can be remapped to the **P1/P2 button**; remapping multiple buttons are not supported.
- **D-pad, View, Menu, Share, Xbox, LT, and RT** buttons are not supported for configuration.
- Press and hold [**P1/P2 button** + the button you wish to configure], then press the **Star button** to complete the configuration. To cancel, press and hold [**P1/P2 button** + Star button].

配置 P1、P2 键

- \* 可将手柄上的单个按键复制到 **P1、P2 键**, 不支持配置多个按键。
- \* **方向键、视图键、菜单键、分享键、Xbox 键、LT 键、RT 键** 不支持配置。
- \* 按住 **P1 键** 或 **P2 键** + 需要配置的按键, 再按下 **星号键** 完成配置。按住 **P1** 或 **P2 键**, 再按下 **星号键** 可取消此功能。

Battery



- Built-in 1000mAh rechargeable lithium battery with 20 hours of play time over 2.4G connection and 25 hours over Bluetooth connection, with a charging time of 4 hours.

<b>controller status –</b>	→	<b>LED indicator –</b>
Low battery	→	Red LED blinks
Battery charging	→	Green LED blinks
Battery fully charged	→	Green LED stays solid

<b>The LED indicator status of the charging dock</b>	→	Amber light stays solid
Charging	→	琥珀色常亮
Fully charged	→	White light stays solid
	→	白色常亮

- The controller will automatically shut down if it fails to connect within 1 minute of startup, or if there are no operations within 15 minutes after establishing a connection.
- The controller will not shut down during wired connection.

电源



- \* 配备 1000mAh 可充电式锂电池, 2.4G 连接可持续使用约 20 小时, 蓝牙连接可持续使用约 25 小时, 充电时间约 4 小时。

<b>手柄电源状态 –</b>	→	<b>电源指示灯状态 –</b>
电量不足	→	红灯闪烁
正在充电	→	绿灯闪烁
充电完成	→	绿灯常亮

<b>底座电源状态 –</b>	→	<b>底座电源指示灯状态 –</b>
正在充电	→	琥珀色常亮
充电完成	→	白色常亮

- \* 开机后 1 分钟内未连接, 或连接后 15 分钟内无操作会自动关机。
- \* 有线连接时不会自动关机。

Ultimate Software X

- Press the **Profile button** to activate, switch or deactivate the customized profiles. There is no profile in the default setting.
- Please visit [app.8bitdo.com](http://app.8bitdo.com) to access the application. It offers elite control over every aspect of your controller: customize button mapping, adjust the sensitivity of analog sticks and triggers, and control vibration intensity.

自定义配置

- \* 配置后按下 **配置键** 可开启 / 切换 / 关闭自定义配置, 默认无配置。
- \* 请访问 [app.8bitdo.cn](http://app.8bitdo.cn) 获取精英软件 X, 可对手柄按键映射、摇杆灵敏度、扳机键灵敏度、振动强度等功能进行自定义配置。

Re-pair the Controller and Adapter

If the connection is lost or the adapter needs to be re-paired, you can follow the steps below to re-pair the controller with the adapter:

1. Turn the **mode switch** to **PC/2.4G** position.
2. Connect the **2.4G adapter** to your Windows device.
3. Press the **Xbox button** to turn on the controller.
4. Hold the **Pairing button** for 3 seconds to enter the pairing mode, the **LED indicator** will blink rapidly.
5. Both **LED indicators** on the controller and receiver will become solid when the connection is successful.

重新配对接收器

如果连接丢失或需要重新配对接收器, 可使用以下方法重新将手柄与接收器配对:

1. 将 **模式开关** 移动到 **2.4G** 位置。
2. 将 **2.4G 接收器** 连接到 Windows 设备的 **USB 端口**。
3. 按下 **Xbox 键** 开启手柄。
4. 按住 **配对键** 约 3 秒至 **状态指示灯** 快速闪烁, 进入配对状态。
5. 连接完成后, 手柄与接收器 **状态指示灯** 均常亮。

Support



- please visit [support.8bitdo.com](http://support.8bitdo.com) for further information & additional support.

技术支持



- \* 请访问 [support.8bitdo.cn](http://support.8bitdo.cn) 了解详细信息。