


- Press the **Xbox button** to turn on the controller.
- Hold the **Xbox button** for 6 seconds to turn off the controller.
- Hold the **Xbox button** for 12 seconds to force the controller off.

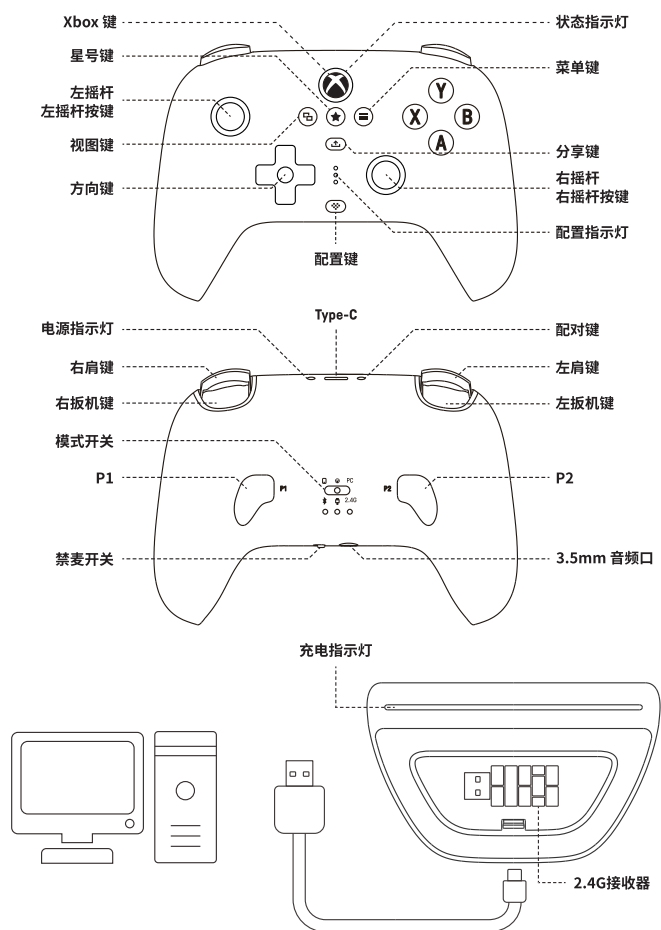

- * 开机:按下 **Xbox 键**。
- * 关机:按住 **Xbox 键** 6 秒。
- * 强制关机:按住 **Xbox 键** 12 秒。

Xbox Series/One console

- The latest system version of the Xbox console is required.

Wired Connection

1. Turn the **mode switch** to **Xbox/USB** position.
2. Connect the controller to your Xbox console via a USB cable.
3. Press the **Xbox button** to turn on the controller and wait till the controller is successfully recognized by the console. The **LED indicator** will stay solid when the connection is successful.

Windows 10/11

- Windows 10(1903) or above is required.

Wireless Connection

1. Connect the **2.4G adapter** to your Windows device.
2. Turn the **mode switch** to **PC/2.4G** position.
3. Press the **Xbox button** to turn on the controller and wait till the controller is successfully recognized by the device. Both **LED indicators** on the controller and the adapter will stay solid when the connection is successful.

Wired Connection

1. Turn the **mode switch** to **Xbox/USB** position.
2. Connect the controller to your Windows device via a USB cable.
3. Press the **Xbox button** to turn on the controller and wait till the controller is successfully recognized by the console. The **LED indicator** will stay solid when the connection is successful.

Android

- Android 9.0 or above is required.

Bluetooth Connection

1. Turn the mode switch to **Mobile/Bluetooth** position.
2. Press the **Xbox button** to turn on the controller.
3. Hold the **Pairing button** for 3 seconds to enter the pairing mode, the **LED indicator** will blink rapidly. (This is required for the very first time only.)
4. Go to your Android device's Bluetooth list and pair with [SBitDo Ultimate 3mode Xbox], the **LED indicator** will stay solid when the connection is successful.

Apple

- iOS 18.2, iPadOS 18.2, tvOS 18.2, macOS 15.2, visionOS 2.2 or above is required.

Apple®, iPadOS®, macOS®, and tvOS® are trademarks of Apple Inc., registered in the U.S. and other countries.

Bluetooth connection

1. Turn the mode switch to **Mobile/Bluetooth** position.
2. Press the **Xbox button** to turn on the controller.
3. Hold the **Pairing button** for 3 seconds to enter the pairing mode, the **LED indicator** will blink rapidly. (This is required for the very first time only.)
4. Go to your Apple device's Bluetooth list and pair with [SBitDo Ultimate 3mode Xbox], the **LED indicator** will stay solid when the connection is successful.

Xbox Series 系列 / One 系列主机

- * 要求 Xbox 主机系统版本已更新到最新版本。

有线连接

1. 将 **模式开关** 移动到 **有线** 位置。
2. 使用 **USB 线** 将手柄连接到 Xbox 主机的 **USB 端口**。
3. 按下 **Xbox 键** 开启手柄, 等待系统识别完成后, **状态指示灯** 常亮。

Windows 10 / 11

- * 要求 Windows 设备系统版本为 Windows 10 (1903) 或更高版本。

无线连接

1. 将配备的 **2.4G 接收器** 连接到 Windows 设备的 **USB 端口**。
2. 将 **模式开关** 移动到 **2.4G** 位置。
3. 按下 **Xbox 键** 开启手柄, 等待系统识别完成后, **状态指示灯** 常亮。

有线连接

1. 将 **模式开关** 移动到 **有线** 位置。
2. 使用 **USB 线** 将手柄连接到 Windows 设备的 **USB 端口**。
3. 按下 **Xbox 键** 开启手柄, 等待系统识别完成后, **状态指示灯** 常亮。

Android

- * 要求 Android 设备系统版本为 Android 9.0 或更高版本。

蓝牙连接

1. 将 **模式开关** 移动到 **蓝牙** 位置。
2. 按下 **Xbox 键** 开启手柄。
3. 按下 **配对键** 约 3 秒至 **状态指示灯** 快速闪烁, 进入配对状态。(仅首次连接时需要配对)
4. 打开 Android 设备蓝牙, 搜索 SBitDo Ultimate 3mode Xbox 手柄连接, 连接完成后 **状态指示灯** 常亮。

Apple


- * 要求 iOS 18.2, iPadOS 18.2, tvOS 18.2, macOS 15.2, visionOS 2.2 或更高版本。

蓝牙连接

1. 将 **模式开关** 移动到 **蓝牙** 位置。
2. 按下 **Xbox 键** 开启手柄。
3. 按下 **配对键** 约 3 秒至 **状态指示灯** 快速闪烁, 进入配对状态。(仅首次连接时需要配对)
4. 打开 Apple 设备蓝牙, 搜索 SBitDo Ultimate 3mode Xbox 手柄连接, 连接完成后 **状态指示灯** 常亮。


Volume Control

- Press and hold the following button combos to adjust the balance between voice and game volume.
 - Beeps when adjusted to maximum/minimum, vibration when adjusted to middle value.
 - 3.5mm earphones are not supported when connected via Bluetooth.
- Press and hold the **Profile button + D-pad up/down** to turn up/down in-game volume.
Press and hold the **Profile button + D-pad left/right** to adjust the balance between voice and game volume.

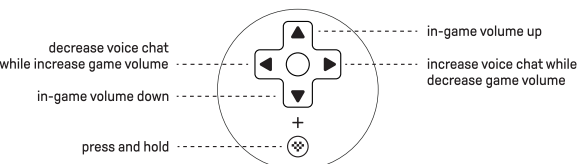

声音调节

- * 可通过组合键调整耳机的音量与声音平衡。调整到最大 / 最小值时会有提示音表示已调整到极限, 调整到中间值 (默认) 时会有振动提示。
 - * 蓝牙连接时不支持 3.5mm 耳机。
- 按住 **配置键 + 方向键上、下** 可提高、降低音量。
按住 **配置键 + 方向键左、右** 可调节语音、游戏之间的音量平衡。

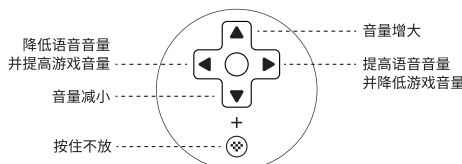

Fast Button Swap

- The Fast Button Swap feature is temporary and will revert to default settings upon reconnection. For permanent button configuration, please use Ultimate Software X.
- The **Profile LED indicator** will blink continuously when the swapped button is pressed.
- **D-pad, View, Menu, Share, Xbox, LT, and RT** buttons are not supported for the button swap.
- Press and hold any of the two buttons, then press the **Star button** to activate the Fast Button Swap. Repeat the same procedure or reconnect the controller will deactivate the function.

快速交换按键

- * 快速交换按键功能仅适用于临时重新交换按键功能, 重新连接后失效。若要固定修改请使用精英软件 X。
- * 已交换的按键按下时 **配置指示灯** 会持续闪烁表示此按键的功能已变更。
- * **方向键、视图键、菜单键、分享键、Xbox 键、LT 键、RT 键** 不支持配置。
- * 按住需要交换的两个按键, 再按下 **星号键** 完成交换。重复此操作或重新连接手柄可取消此功能。

P1/P2 Button Configuration

- Only one button on the controller can be remapped to the **P1/P2 button**; remapping multiple buttons are not supported.
- **D-pad, View, Menu, Share, Xbox, LT, and RT** buttons are not supported for configuration.
- Press and hold (**P1/P2 button + the button you wish to configure**), then press the **Star button** to complete the configuration. To cancel, press and hold (**P1/P2 button + Star button**).

配置 P1、P2 键

- * 可将手柄上的单个按键复制到 **P1、P2 键**, 不支持配置多个按键。
- * **方向键、视图键、菜单键、分享键、Xbox 键、LT 键、RT 键** 不支持配置。
- * 按住 **P1 键** 或 **P2 键 + 需要配置的按键**, 再按下 **星号键** 完成配置。按住 **P1 或 P2 键**, 再按下 **星号键** 可取消此功能。

Battery

- Built-in 1000mAh rechargeable lithium battery with 20 hours of play time over 2.4G connection and 25 hours over Bluetooth connection, with a charging time of 4 hours.

controller status –	—————>	LED indicator –
Low battery	—————>	Red LED blinks
Battery charging	—————>	Green LED blinks
Battery fully charged	—————>	Green LED stays solid

The LED indicator status of the charging dock	—————>	Amber light stays solid
Charging	—————>	White light stays solid
Fully charged	—————>	

- The controller will automatically shut down if it fails to connect within 1 minute of startup, or if there are no operations within 15 minutes after establishing a connection.
- The controller will not shut down during wired connection.

电源

- * 配备 1000mAh 可充电锂电池, 2.4G 连接可连续使用约 20 小时, 蓝牙连接可连续使用约 25 小时, 充电时间约 4 小时。

手柄电源状态 –	—————>	电源指示灯状态 –
电量不足	—————>	红灯闪烁
正在充电	—————>	绿灯闪烁
充电完成	—————>	绿灯常亮

底座电源状态 –	—————>	底座电源指示灯状态 –
正在充电	—————>	琥珀色常亮
充电完成	—————>	白色常亮

- * 开机后 1 分钟内未连接, 或连接后 15 分钟内无操作会自动关机。
- * 有线连接时不会自动关机。

Safety Warnings

- Please always use batteries, chargers, and accessories provided by the manufacturer.
- The manufacturer is not liable for any safety issues arising from the use of non-manufacturer-approved accessories.
- Do not attempt to disassemble, modify, or repair the device yourself. Unauthorized actions may result in serious injury.
- Avoid crushing, disassembling, puncturing, or attempting to modify the device or its battery, as these actions can be dangerous.
- Any unauthorized changes or modifications to the device will void the manufacturer's warranty.

安全警示

- * 请使用制造商的电池、充电器、配件。
- * 在用户使用第三方的配件时, 制造商不能对用户的安全负责。
- * 请勿自行拆卸、改装或修理设备。
- * 请勿挤压、拆解、刺穿或尝试改装设备及电池。
- * 对设备的任意变动或改装, 将导致制造商对设备不予保修。

Ultimate Software X

- Press the **Profile button** to activate, switch or deactivate the customized profiles. There is no profile in the default setting.
- Please visit app.8bitdo.com to access the application. It offers elite control over every aspect of your controller: customize button mapping, adjust the sensitivity of analog sticks and triggers, and control vibration intensity.

自定义配置

- * 配置后按下 **配置键** 可开启 / 切换 / 关闭自定义配置, 默认无配置。
- * 请访问 app.8bitdo.cn 获取精英软件 X, 可对手柄按键映射、摇杆灵敏度、扳机键灵敏度、振动强度等功能进行自定义配置。

Re-pair the Controller and Adapter

- If the connection is lost or the adapter needs to be re-paired, you can follow the steps below to re-pair the controller with the adapter:
1. Turn the **mode switch** to **PC/2.4G** position.
 2. Connect the **2.4G adapter** to your Windows device.
 3. Press the **Xbox button** to turn on the controller.
 4. Hold the **Pairing button** for 3 seconds to enter the pairing mode, the **LED indicator** will blink rapidly.
 5. Both **LED indicators** on the controller and receiver will become solid when the connection is successful.

重新配对接收器

- 如果连接丢失或需要重新配对接收器, 可使用以下方法重新将手柄与接收器配对:
1. 将 **模式开关** 移动到 **2.4G** 位置。
 2. 将 **2.4G 接收器** 连接到 Windows 设备的 **USB 端口**。
 3. 按下 **Xbox 键** 开启手柄。
 4. 按下 **配对键** 约 3 秒至 **状态指示灯** 快速闪烁, 进入配对状态。
 5. 连接完成后, 手柄与接收器 **状态指示灯** 均常亮。

Support

- please visit support.8bitdo.com for further information & additional support.



技术支持

- * 请访问 support.8bitdo.cn 了解详细信息。

